

MINI SCISSOR LIFTS SERIES

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point



FEATURES



Safety Configuration

Automatic braking system	Platform self-locking door
Emergency descent system	Foldable fence
Charging protection system	
Oil pipe explosion-proof system	
Tilt protection system	
Automatic pothole protection	
Emergency stop button	
Tamper-proof	

Other Configuration

Full Self-propelled	
Non-marking tire	
4x2 drive	
Extended platform	
Horn& Buzzer	
Standard transport forklift hole	
Work schedule	
Continuously variable speed	

Model	GTJZD04
Size	
Working Height	6m
A-Platform Height-Elevated	4m
B-Platform height-Stowed	0.95m
C-Platform Length	1.29m
D-Platform Width	0.7m
Platform Extension	0.6m
E-Overall Height (unfolded guardrail)	2.00m
Overall height (folded guardrail)	1.63m
F-Overall Length	1.48m
G-Overall Width	0.76m
H-Wheelbase	1.05m
I-Ground clearance (Stowed)	0.06m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	100kg
Platform Capacity	240kg
Max. Number of Workers	2
Driving Speed (Stowed)	4.0km/h
Driving Speed (Raised)	0.5km/h
Turning radius (outside)	1.35m
Turning radius (inside)	0.3m
Lifting speed	4-6m/min
Gradeability	0.25
Max. Working Angle	2°/3°
Tire(drive wheel)	Φ230×80mm
Power	
Battery	2×12V/80ah
Charger	24V/15A
Weight	
Gross	890kg

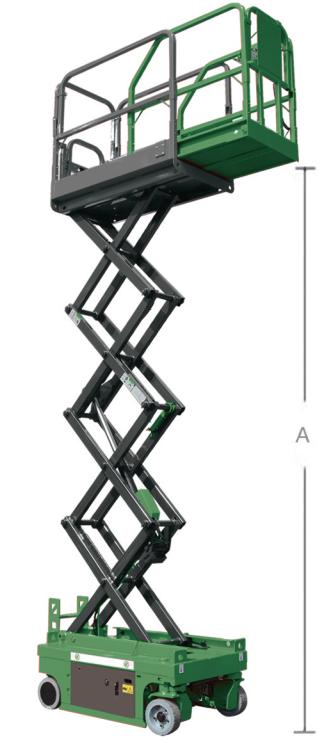

MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point

FEATURES

Safety Configuration

- | | |
|---------------------------------|----------------------------|
| Automatic braking system | Platform self-locking door |
| Emergency descent system | Foldable fence |
| Charging protection system | |
| Oil pipe explosion-proof system | |
| Tilt protection system | |
| Automatic pothole protection | |
| Emergency stop button | |
| Tamper-proof | |


Other Configuration

- | | |
|----------------------------------|--|
| Full Self-propelled | |
| Non-marking tire | |
| 4x2 drive | |
| Extended platform | |
| Horn& Buzzer | |
| Standard transport forklift hole | |
| Work schedule | |
| Continuously variable speed | |



DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	QY0508DEM
Size	
Working Height	6.5m
A-Platform Height-Elevated	4.5m
B-Platform height-Stowed	0.99m
C-Platform Length	1.29m
D-Platform Width	0.7m
Platform Extension	0.6m
E-Overall Height (unfolded guardrail)	2.09m
Overall height (folded guardrail)	1.73m
F-Overall Length	1.39m
G-Overall Width	0.81m
H-Wheelbase	1.11m
I-Ground clearance (Stowed)	0.85m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	100kg
Platform Capacity	230kg
Max. Number of Workers	3
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.5km/h
Turning radius (outside)	1.35m
Turning radius (inside)	0.3m
Lifting speed	4-6m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ255×80mm
Power	
Battery	2×12V/103ah
Charger	24V/15A
Weight	
Gross	1010kg



MINI SCISSOR LIFTS SERIES

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point

FEATURES

Safety Configuration



- | | |
|---------------------------------|----------------------------|
| Automatic braking system | Platform self-locking door |
| Emergency descent system | Foldable fence |
| Charging protection system | |
| Oil pipe explosion-proof system | |
| Tilt protection system | |
| Automatic pothole protection | |
| Emergency stop button | |
| Tamper-proof | |

Other Configuration

- | | |
|----------------------------------|--|
| Full Self-propelled | |
| Non-marking tire | |
| 4x2 drive | |
| Extended platform | |
| Horn& Buzzer | |
| Standard transport forklift hole | |
| Work schedule | |
| Continuously variable speed | |



Model	GTJZ0607HD
Size	
Working Height	7.8m
A-Platform Height-Elevated	5.8m
B-Platform height-Stowed	1.1m
C-Platform Length	1.67m
D-Platform Width	0.74m
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.21m
Overall height (folded guardrail)	1.85m
F-Overall Length	1.855m
G-Overall Width	0.79m
H-Wheelbase	1.36m
I-Ground clearance (Stowed)	0.083m
J-Ground Clearance (Raised)	0.016m
Performance	
Capacity of Extension	113kg
Platform Capacity	230kg
Max. Number of Workers	3
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning radius (outside)	1.64m
Turning radius (inside)	0.3m
Lifting speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ305×100mm
Power	
Battery	4×12V/80ah
Charger	24V/30A
Weight	
Gross	1620kg

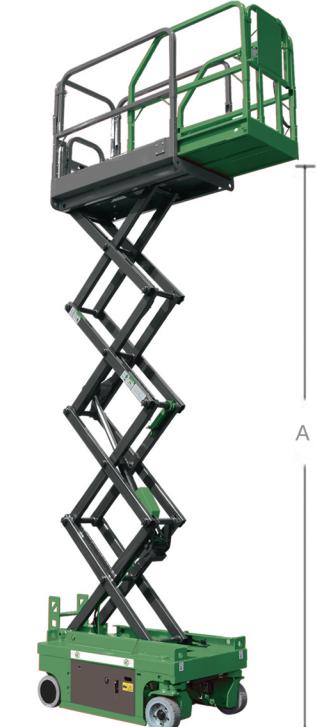

MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point

FEATURES

Safety Configuration

- | | |
|---------------------------------|----------------------------|
| Automatic braking system | Platform self-locking door |
| Emergency descent system | Foldable fence |
| Charging protection system | |
| Oil pipe explosion-proof system | |
| Tilt protection system | |
| Automatic pothole protection | |
| Emergency stop button | |
| Tamper-proof | |



Other Configuration

- | | |
|----------------------------------|--|
| Full Self-propelled | |
| Non-marking tire | |
| 4x2 drive | |
| Extended platform | |
| Horn& Buzzer | |
| Standard transport forklift hole | |
| Work schedule | |
| Continuously variable speed | |



DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	GTJZ0608HD
Size	
Working Height	7.80m
A-Platform Height-Elevated	5.80m
B-Platform height-Stowed	1.1m
C-Platform Length	2.26
D-Platform Width	0.81m
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.2m
Overall height (folded guardrail)	1.73m
F-Overall Length	2.48m
G-Overall Width	0.84m
H-Wheelbase	1.89m
I-Ground clearance (Stowed)	0.1m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	230kg
Max. Number of Workers	5
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning radius (outside)	3.1m
Turning radius (inside)	0.3m
Lifting speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ381×127mm
Power	
Battery	4×6V/200ah
Charger	24V/30A
Weight	
Gross	1880kg

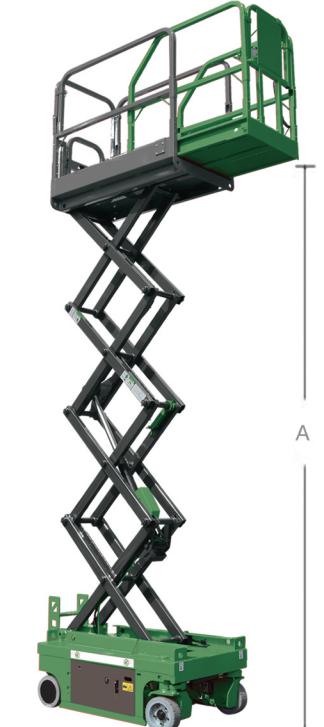

MINI SCISSOR LIFTS SERIES

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point



FEATURES



Safety Configuration

- | | |
|---------------------------------|----------------------------|
| Automatic braking system | Platform self-locking door |
| Emergency descent system | Foldable fence |
| Charging protection system | |
| Oil pipe explosion-proof system | |
| Tilt protection system | |
| Automatic pothole protection | |
| Emergency stop button | |
| Tamper-proof | |

Other Configuration

- | | |
|----------------------------------|--|
| Full Self-propelled | |
| Non-marking tire | |
| 4x2 drive | |
| Extended platform | |
| Horn& Buzzer | |
| Standard transport forklift hole | |
| Work schedule | |
| Continuously variable speed | |

Model	GTJZ0612HD
Size	
Working Height	7.80m
A-Platform Height-Elevated	5.80m
B-Platform height-Stowed	1.1m
C-Platform Length	2.29m
D-Platform Width	1.15m
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.2m
Overall height (folded guardrail)	1.68m
F-Overall Length	2.48m
G-Overall Width	1.19m
H-Wheelbase	1.89m
I-Ground clearance (Stowed)	0.1m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	450kg
Max. Number of Workers	7
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning radius (outside)	2.2m
Turning radius (inside)	0.3m
Lifting speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ381×127mm
Power	
Battery	4×6V/200ah
Charger	24V/30A
Weight	
Gross	2150kg

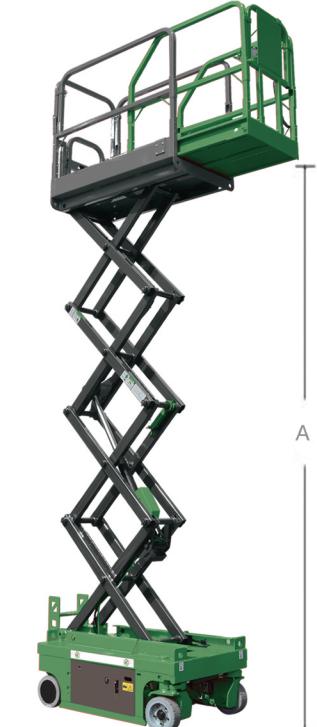

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration


Automatic braking system	Platform self-locking door
Emergency descent system	Safe maintenance support rod
Charging protection system	Fault diagnosis system
Oil pipe explosion-proof system	Foldable fence
Tilt protection system	
Automatic pothole protection	
Emergency stop button	
Tamper-proof	

Other Configuration

Full Self-propelled	
Non-marking tire	
4x2 drive	
Extended platform	
Horn& Buzzer	
Standard transport forklift hole	
Work schedule	
Continuously variable speed	
Remote car lock	
GPS positioning	

DETAILED PARAMETERS OF SCISSOR LIFT

Model		GTJZ0808HD
Size		
Working Height	9.80m	
A-Platform Height-Elevated	7.80m	
B-Platform Height-Stowed	1.2m	
C-Platform Length	2.26	
D-Platform Width	0.84	
Platform Extension	0.9m	
E-Overall Height (unfolded guardrail)	2.32m	
Overall height (folded guardrail)	1.85m	
F-Overall Length	2.48	
G-Overall Width	0.84	
H-Wheelbase	1.89m	
I-Ground Clearance (Stowed)	0.1	
J-Ground Clearance (Raised)	0.02	
Performance		
Capacity of Extension	113kg	
Platform Capacity	230kg	
Max. Number of Workers	1 person+70kg	
Driving Speed (Stowed)	3.5km/h	
Driving Speed (Raised)	0.8km/h	
Turning Radius (Outside)	3.1m	
Turning Radius (Inside)	0m	
Lifting Speed	3-5m/min	
Gradeability	0.25	
Max. Working Angle	1.5°/3°	
Tire(Drive Wheel)	Φ381×127mm	
Power		
Battery	4×12V/240ah	
Charger	24V/30A	
Weight		
Gross	2030kg	

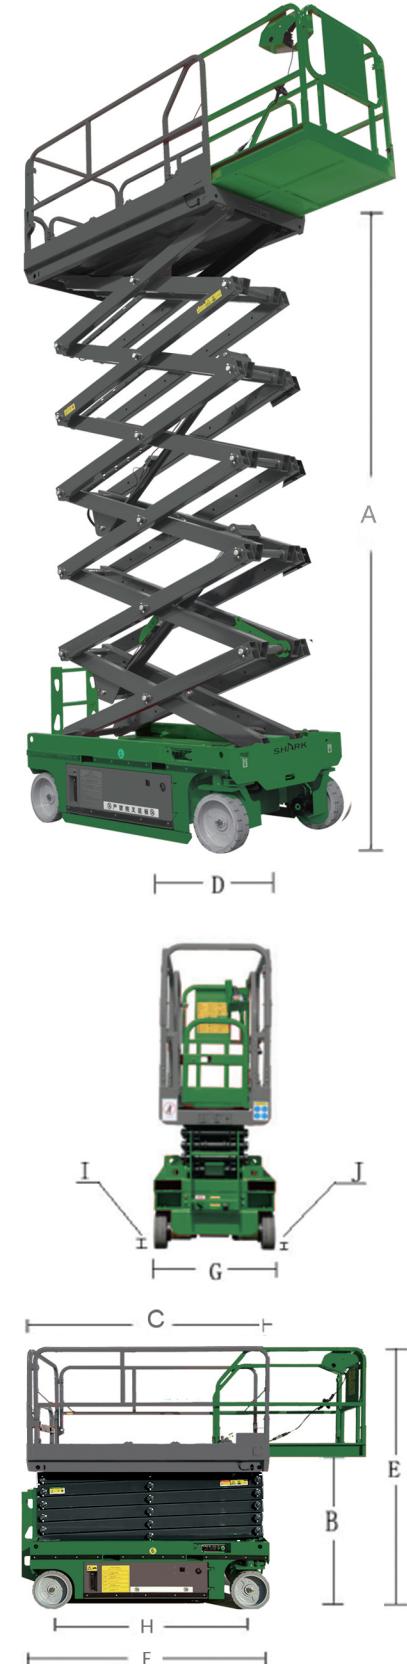

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration


Automatic braking system	Platform self-locking door
Emergency descent system	Safe maintenance support rod
Charging protection system	Fault diagnosis system
Oil pipe explosion-proof system	Foldable fence
Tilt protection system	
Automatic pothole protection	
Emergency stop button	
Tamper-proof	

Other Configuration

Full Self-propelled	
Non-marking tire	
4×2 drive	
Extended platform	
Horn& Buzzer	
Standard transport forklift hole	
Work schedule	
Continuously variable speed	
Remote car lock	
GPS positioning	

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ0812HD
Size	
Working Height	9.80m
A-Platform Height-Elevated	7.80m
B-Platform Height-Stowed	1.2m
C-Platform Length	2.29
D-Platform Width	1.12
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.32m
Overall height (folded guardrail)	1.82m
F-Overall Length	2.48
G-Overall Width	1.19
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02
Performance	
Capacity of Extension	113kg
Platform Capacity	450kg
Max. Number of Workers	3 Person
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	2°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×6V/240ah
Charger	24V/30A
Weight	
Gross	2280kg

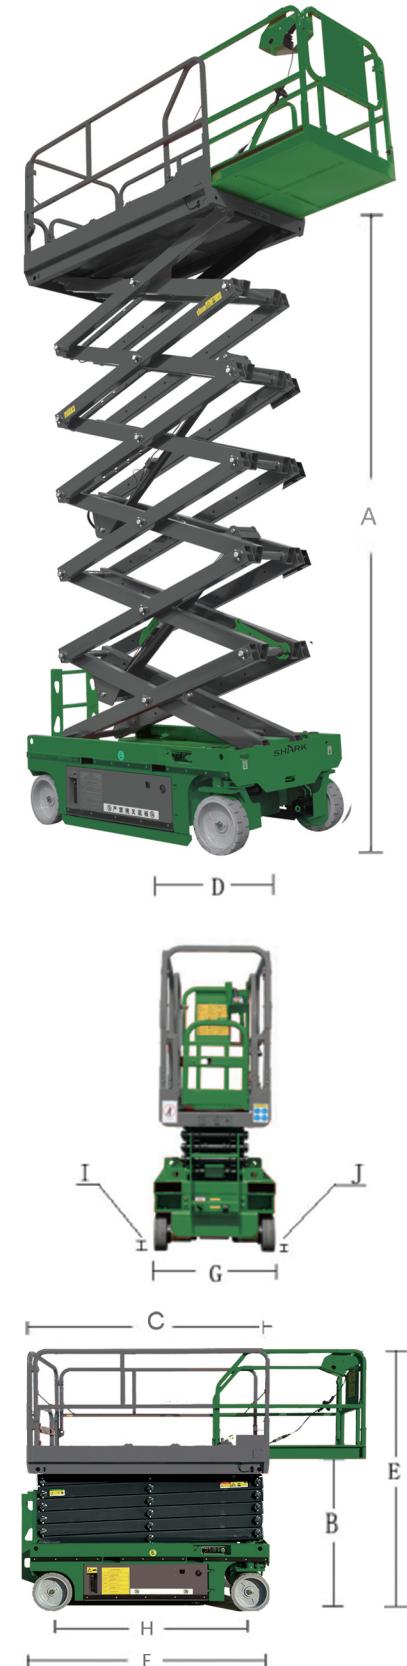

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration


Automatic braking system	Platform self-locking door
Emergency descent system	Safe maintenance support rod
Charging protection system	Fault diagnosis system
Oil pipe explosion-proof system	Foldable fence
Tilt protection system	
Automatic pothole protection	
Emergency stop button	
Tamper-proof	

Other Configuration

Full Self-propelled	
Non-marking tire	
4×2 drive	
Extended platform	
Horn& Buzzer	
Standard transport forklift hole	
Work schedule	
Continuously variable speed	
Remote car lock	
GPS positioning	

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ1012HD
Size	
Working Height	11.80m
A-Platform Height-Elevated	9.80m
B-Platform Height-Stowed	1.35m
C-Platform Length	2.29
D-Platform Width	1.12
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.46m
Overall height (folded guardrail)	1.92m
F-Overall Length	2.48
G-Overall Width	1.19
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	320kg
Max. Number of Workers	2 Person
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×6V/240ah
Charger	24V/30A
Weight	
Gross	2540kg

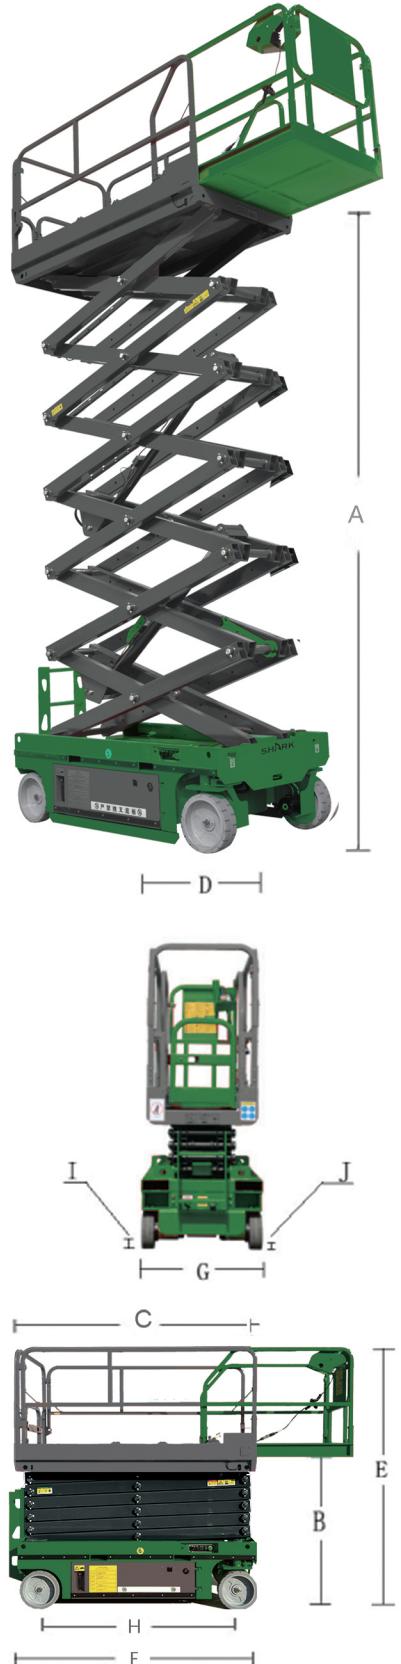

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration


Automatic braking system	Platform self-locking door
Emergency descent system	Safe maintenance support rod
Charging protection system	Fault diagnosis system
Oil pipe explosion-proof system	Foldable fence
Tilt protection system	
Automatic pothole protection	
Emergency stop button	
Tamper-proof	

Other Configuration

Full Self-propelled	
Non-marking tire	
4×2 drive	
Extended platform	
Horn& Buzzer	
Standard transport forklift hole	
Work schedule	
Continuously variable speed	
Remote car lock	
GPS positioning	

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ1212HD
Size	
Working Height	13.80m
A-Platform Height-Elevated	11.80m
B-Platform Height-Stowed	1.48m
C-Platform Length	2.29
D-Platform Width	1.12
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.58m
Overall height (folded guardrail)	2.05m
F-Overall Length	2.48
G-Overall Width	1.19
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	320kg
Max. Number of Workers	2 Person
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×6V/240ah
Charger	24V/30A
Weight	
Gross	2880kg

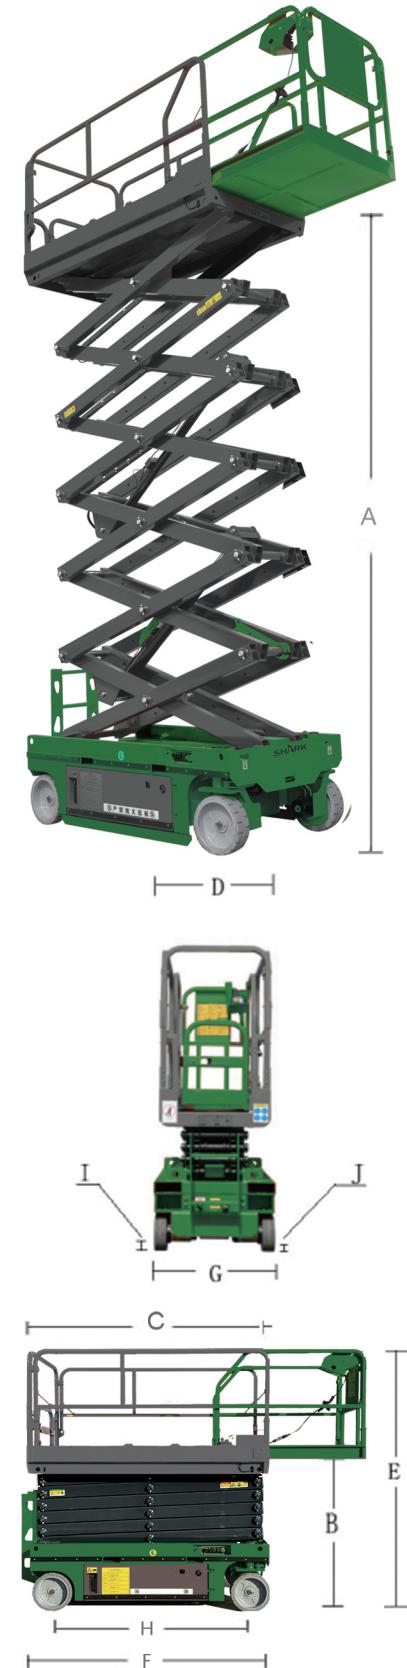

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration

Automatic braking system	Platform self-locking door
Emergency descent system	Safe maintenance support rod
Charging protection system	Fault diagnosis system
Oil pipe explosion-proof system	Foldable fence
Tilt protection system	
Automatic pothole protection	
Emergency stop button	
Tamper-proof	

Other Configuration

Full Self-propelled	
Non-marking tire	
4x2 drive	
Extended platform	
Horn& Buzzer	
Standard transport forklift hole	
Work schedule	
Continuously variable speed	
Remote car lock	
GPS positioning	

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ1414HD
Size	
Working Height	15.8m
A-Platform Height-Elevated	13.80m
B-Platform Height-Stowed	1.495m
C-Platform Length	2.64
D-Platform Width	1.13
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.595m
Overall height (folded guardrail)	2.060m
F-Overall Length	2.84
G-Overall Width	1.4m
H-Wheelbase	1.895m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	227kg
Max. Number of Workers	1 person+70kg
Driving Speed (Stowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×12V/240ah
Charger	24V/30A
Weight	
Gross	3400kg

